

# Delo® Bumper-to-Bumper Protection for Concrete Trucks




## Engine Crankcase

Delo 400 LE Synthetic SAE 5W-40  
 Delo 400 LE SAE 15W-40  
 Delo 400 XLE Synblend SAE 10W-30  
 Delo 400 XLE Synblend SAE 15W-40  
 Delo 400 SD Severe Duty SAE 15W-30\*\*



## Coolant System

Delo ELC Antifreeze/Coolant  
 Delo XLC Antifreeze/Coolant

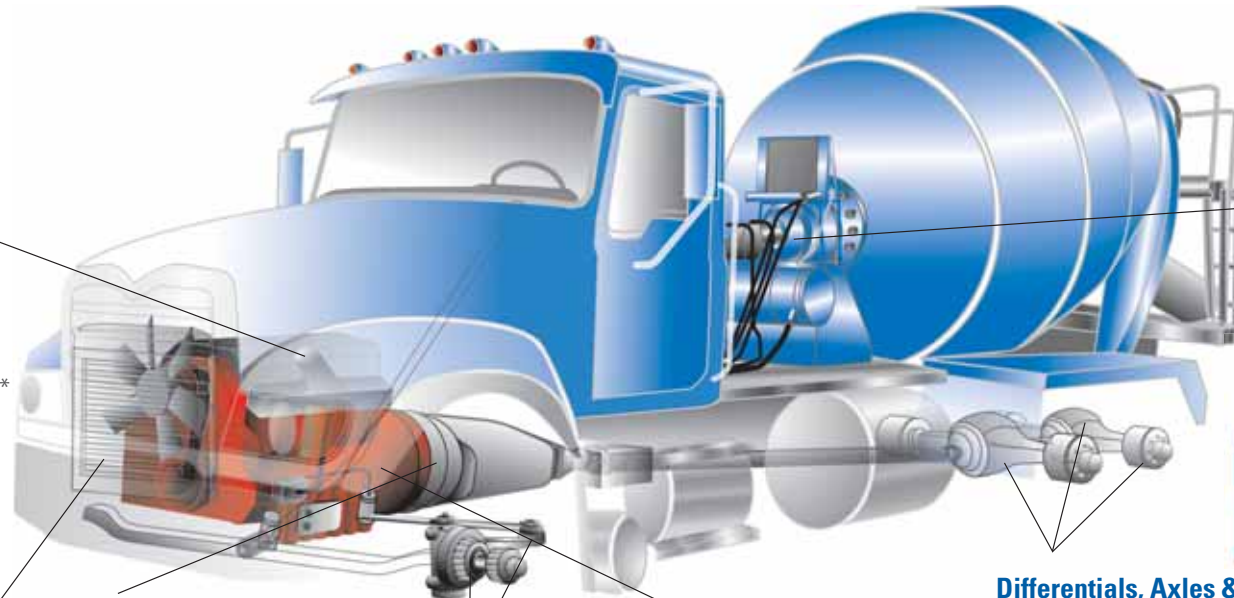

## Clutch Bearings

Delo Grease ESI®  
 Delo Grease EP  
 Delo Heavy Duty EP



## Grease Points, Rods, Pins & Bearings

Delo Grease ESI  
 Delo Grease EP  
 Delo Heavy Duty EP

## Transmissions (Manual & Automatic)

Delo Syn-Trans XE SAE 75W-90 (Manual)  
 Delo Trans ESI SAE 40 (Manual)  
 Delo Syn ATF HD  
 Chevron ATF HD 389



## Hydraulic System

Rando HD  
 Rando HDZ  
 Rando Premium MV



## Differentials, Axles & Wheel Bearings

Delo Syn-Gear XDM SAE 75W-90  
 Delo Gear ESI SAE 80W-90

\*\*Severe duty applications typically have lower drain intervals relative to other duty cycles. See OEM recommendations for drain interval recommendations.

The product recommendations provide general guidelines for use in cement trucks. All manufacturers have different coolant and lubricant requirements and recommendations. It will be important to contact a Chevron representative or refer to the Original Equipment Manufacturer manual to confirm the proper product is used for the application. You may contact our LUBETEK organization (800-LUBE-TEK) for confirmation of specific OEM specifications.



**Delo®**  
 Let's go further.™

A Chevron company product

© 2016 Chevron Canada Limited. All rights reserved. All trademarks are the property of Chevron Intellectual Property LLC. CH2016DBTBCTE