



Delo® Bumper-to-Bumper Protection for Heavy-Duty Tow Trucks




Engine Crankcase

Delo 400 LE Synthetic SAE 5W-30
 Delo 400 LE Synthetic SAE 5W-40
 Delo 400 XLE Synblend SAE 10W-30
 Delo 400 XLE Synblend SAE 15W-40
 Delo 400 LE SAE 15W-40
 Delo 400 SD Severe Duty SAE 15W-30*



Coolant System

Delo ELC Antifreeze/Coolant
 Delo XLC Antifreeze/Coolant

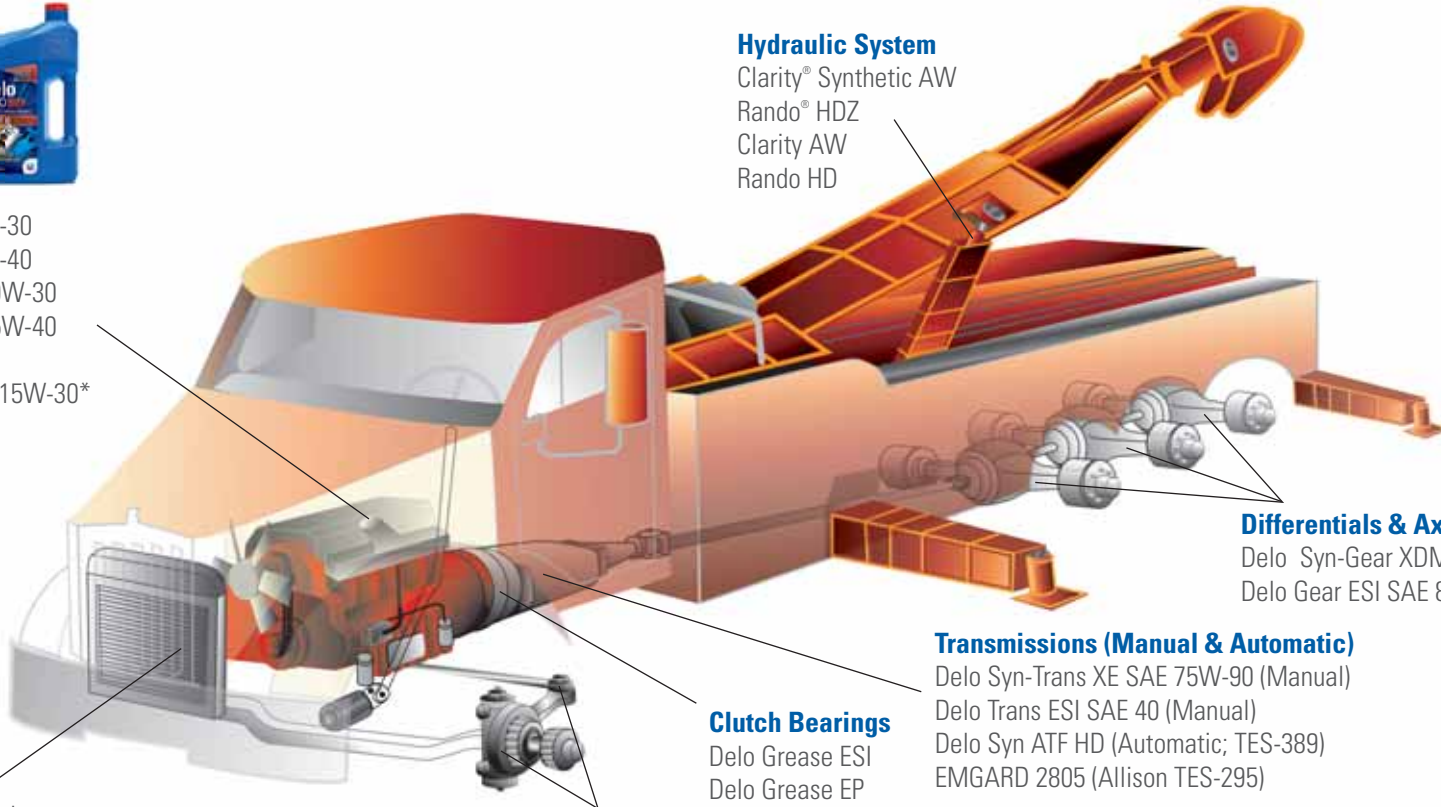

Hydraulic System

Clarity® Synthetic AW
 Rando® HDZ
 Clarity AW
 Rando HD



Differentials & Axles

Delo Syn-Gear XDM SAE 75W-90
 Delo Gear ESI SAE 80W-90

Transmissions (Manual & Automatic)

Delo Syn-Trans XE SAE 75W-90 (Manual)
 Delo Trans ESI SAE 40 (Manual)
 Delo Syn ATF HD (Automatic; TES-389)
 EMGARD 2805 (Allison TES-295)

Clutch Bearings

Delo Grease ESI
 Delo Grease EP

Grease Points, Rods, Pins & Bearings

Delo Grease ESI®
 Delo Grease EP



*Severe duty applications typically have lower drain intervals relative to other duty cycles. See OEM recommendations for drain interval recommendations.

The product recommendations provide general guidelines for use in heavy-duty tow trucks. All manufacturers have different coolant and lubricant requirements and recommendations. It will be important to contact a Chevron representative or refer to the Original Equipment Manufacturer manual to confirm the proper product is used for the application. You may contact our LUBETEK organization (800-LUBE-TEK) for confirmation of specific OEM specifications.



Delo®
 Let's go further.™

A Chevron company product

© 2016 Chevron Canada Limited. All rights reserved. All trademarks are the property of Chevron Intellectual Property LLC. CH2016DBTBTE